



# SPECIFICATIONS

<b>Customer</b>	
<b>Product Name</b>	<b>Wire Wound SMD Power Inductor</b>
<b>URAI Part Number</b>	<b>0630Series</b>
<b>Customer Part Number</b>	

New Released,  Revised]

**【This SPEC is tota 6 pages.】**

**【ROHS Compliant Parts】**

Approved By	Checked By	Issued By

## Shenzhen Yourui Electronics Co., Ltd.

Address: Second floor, C Building, Huiqing Science and Technology Park, Guanlan Street Dafu Industrial Zone, Longhua District, Shenzhen City, China 518000

**【For Customer approval OnDT】**

Date: \_\_\_\_\_

Qualification Status:  Full  Restricted  Rejected


Approved By	Verified By	Re-checked By	Checked By

Comments:

---


产品名称 DESCRIPTION	一体成型贴片电感 SMD MOLDING POWER INDUCTOR
产品型号 ORDERING CODE	DT0630H-Series

外形尺寸及推荐焊盘 External Dimensions & PCB Pattern :

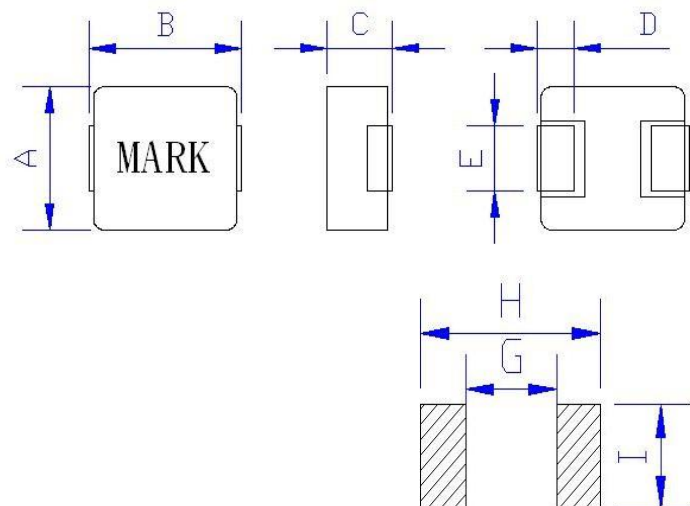

A:	6.6 ± 0.3
B:	7.1 ± 0.5
C:	3.0 Max.
D:	1.5 ± 0.3
E:	3.0 ± 0.3
G:	2.4 Ref.
H:	7.8 Ref.
I:	3.5 Ref.

原理图 Schematic Diagram :



"●" START FOR STAND

物料清单 Material List:

NO	ITEM	MATERIAL	SUPPLIER OF THE MATERIAL
1	CORE	合金粉	DT
2	COPPER	聚酯亚胺漆包线	TOTOKU
3	BLAK	银白色料片	ZS
4	INK	黑色油墨	YMS



产品名称 DESCRIPTION	一体成型贴片电感 SMD MOLDING POWER INDUCTOR
产品型号 ORDERING CODE	DT0630H-Series

### 电气特性 Electrical Characteristic:

\*额定电流：是指基于电感变化率时比标称电感L值低20%和基于温度上升时（因自身发热而温度上升40℃）两者中较小值。

\*饱和电流：瞬间加载后电感值 Inductance下降不超过初始电感值 Inductance30%的电流值。

\*下列参数为我司常规产品特性，如果不能满足您的需求，请与我们联系。

\*测量条件： 1、初始电感量L0：100KHz/1V@25±3℃。

3、工作温度范围：-40℃~85℃。

### 特性参数 Characteristic Data:

产品料号 Part NO.	L0 (μH)	直流电阻		额定电流	饱和电流
	@100kHz/1.0V	DCR (mΩ)		L rms (A)	L sat (A)
	±20%	Typ.	Max.	Typ.	Typ.
DT0630H-R47M	0.47	3.3	4.1	14	20
DT0630H-R68M	0.68	4.8	6	12	18
DT0630H-1R0M	1	8.5	10	8	15
DT0630H-1R5M	1.5	10.8	13	7	13
DT0630H-2R2M	2.2	12.7	16	6	10
DT0630H-3R3M	3.3	23	27.6	5.5	9
DT0630H-4R7M	4.7	32	40	5	8
DT0630H-5R6M	5.6	44	53	4	7
DT0630H-6R8M	6.8	52	60	3.5	6
DT0630H-100M	10	76	94	3	5
DT0630H-150M	15	100	130	2.5	4.5
DT0630H-220M	22	127	152	2	3



产品名称 DESCRIPTION	一体成型贴片电感 SMD MOLDING POWER INDUCTOR	
产品型号 ORDERING CODE	DT0630H-Series	
<b>测试项目 TEST ITEMS</b>	<b>规格要求 SPECIFICATIONS</b>	<b>测试条件/测试方法 TEST CONDITIONS / TEST METHODS</b>
<b>电气特性测试 ELECTRICAL PERFORMANCE TEST</b>		
电感量 (L)	参照特性参数表 REFER TO STANDARD ELECTRICAL CHARACTERISTIC LIST.	MICROTEST6377
直流电阻 (DCR)		TH2511
额定电流 (IDC)		加载电流后, 电感量下降不超过30%, 或温升不超过40℃ APPLIED THE CURRENT TO COILS THE INDUCTANCE CHANGE SHOULD BE LESS THAN 30% TO INITIAL VALUE AND TEMPERATURE RISE SHOULD NOT BE 40℃ TYPICAL
温升测试 TEMPERATURERISE TEST	温升不超过40℃	加载额定电流, 保持4小时 APPLIED THE ALLOWED DC CURRENT FOR 4 HOURS.
过载测试 OVER LOAD TEST	没有明显的电气损坏 NO EVIDENCE OF ELECTRICAL DAMAGE	加载1.5倍额定电流, 保持5分钟 APPLIED 1.5 TIMES OF RATED ALLOWED DC CURRENT TO INDUCTORS FOR A PERIOD OF 5 MINUTES.
<b>MECHANICAL PERFORMANCE TEST</b>		
耐焊性 SOLDER HEAT RESISTANCE	电感器无外观和电气特性损伤 INDUCTORS SHOULD HAVE NO EVIDENCE OF ELECTRICAL AND MICHANICAL DAMAGE	预热: 150℃ 100s Max. 焊锡温度SOLDER TEMPERATURE: 255±5℃ DIP TIME:10s Max. 
振动测试 VIBRATION TEST	电感量变化不超过10% INDUCTANCE SHOULD NOT HANGE MORE THAN±10%	振幅: 1.5 mm 频率: 10-55-10HZ / 1 MIN 方向: X, Y, Z 时间: 2 HRS/X, Y, Z
冲击测试 SHOCK TEST		待测品从距离地面1米高自由跌落至3厘米后的木板上, 10次INDUCTORS SHOULD BE DROPPED 10 TIMES FROM A HEIGHT OF 1m ONTO 3cm WOODEN BOARD.
可焊性测试 SOLDERABILITY TEST	超过90%的电极被锡覆盖 MORE THAN 90% OF TERMINAL ELECTRODE SHOULD BE COVERED WITH SOLDER.	预热: 150℃ 120s 焊接温度: 255±5℃ 时间:10s Max. 




产品名称 DESCRIPTION	一体成型贴片电感 SMD MOLDING POWER INDUCTOR	
产品型号 ORDERING CODE	DT0630H-Series	
<b>TEST ITEMS</b>	<b>SPECIFICATIONS</b>	<b>TEST CONDITIONS / TEST METHODS</b>
<b>环境测试 CLIMATIC TEST</b>		
温度特性 TEMPERATURE CHARACTERISTIC	无外观破损 APPEARANCE:NO DAMAGE  电感量变化不超过10% INDUCTANCE:WITHIN±10% OF INITIAL VALUE.	-45℃ ~ +85℃
湿度测试 HUMIDITY TEST		60℃±2℃ / 96±2 小时 R.H:90-95%RH
低温储存 LOW TEMPERATURE STORAGE		-45℃±2℃ / 24小时  室温静置1小时后测试 Test at room temperature for 1 hour
冷热冲击测试 THERMAL SHOCK TEST		-45±2℃30分钟, +85±2℃ 30分钟 100次循环  静置2小时后测试 Test at room temperature for 1 hour
高温储存 HIGH TEMPERATURE STORAGE		85℃±2℃ / 24小时  室温静置1小时后测试 Test at room temperature for 1 hour




产品名称 DESCRIPTION	一体成型贴片电感 SMD MOLDING POWER INDUCTOR
产品型号 ORDERING CODE	DT0630H-Series

包装方式PACKAGE TYPE :

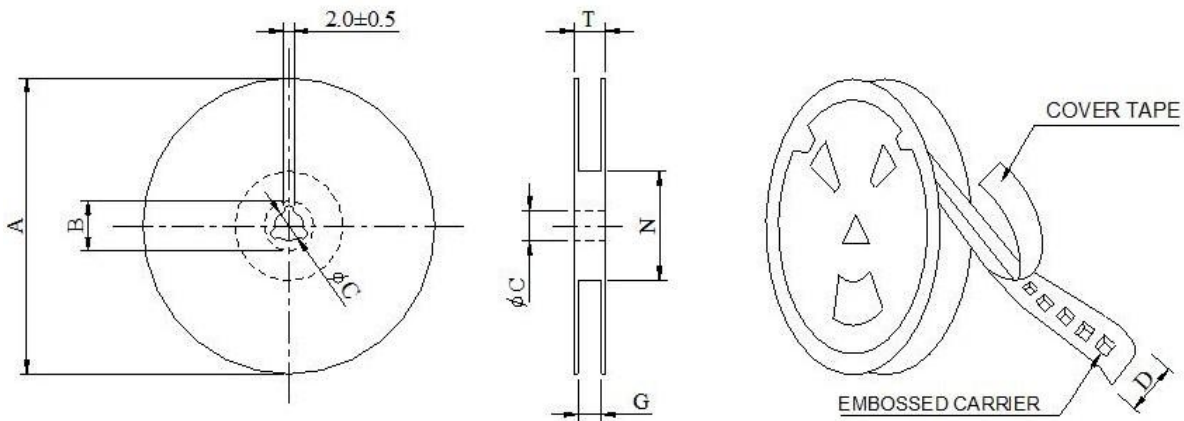

\*CARRIER TAPE WIDTH : D

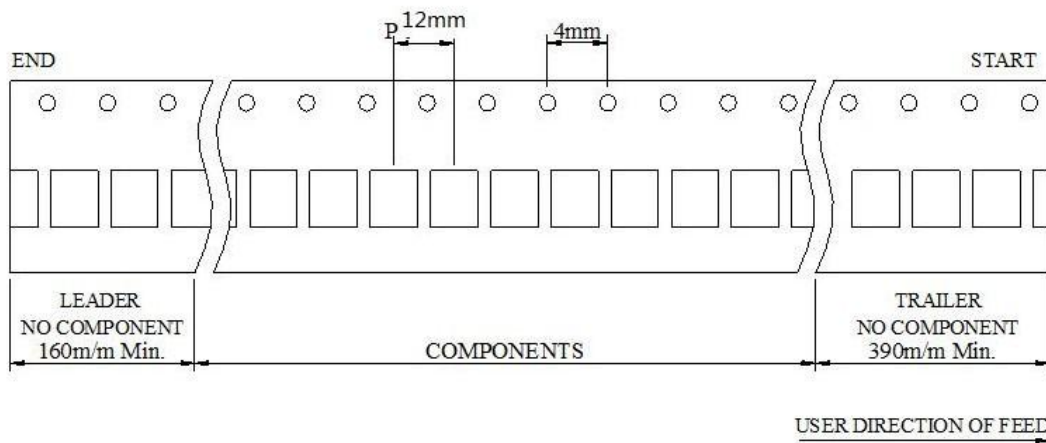

STYLE	DIMENSIONS (m/m)							
	Q'TY (PCS)	A	B±0.8	C±0.5	D	G+0	N-0	T
13	1,000	330	21	13	16	16	100	19